


Product specifications:

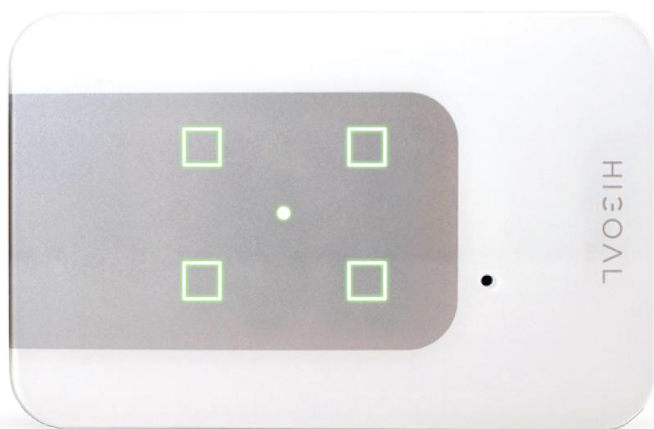

Outputs: 4 x 5A (each)

Options:

- 4 operations buttons:
 - 4 programmable outputs
 - Can be defined as functions (Scenario, Duplicate) On/off, momentary, curtain, Scenario, Duplicate
- 4 On/Off or 2 electric shutters or any other combination

Dry contact: 4 input

IR SENSOR: Built-in

Mini speaker: Built-in

Rated Voltage: AC 110-230V, 50/60 Hz

Standby current: 60ma

Updates: Firmware Over The Air (FOTA)

Front panel:

- 1.5 mm glass cover
- 4 operating buttons + 1 function button
- RGB LED indicator for each button

LED indicator: Different color indicator for each operating mode

Dip Switch: 10 mini switches

Operating frequency: 2400-2483 MHz

Transmission power: 0.04w

Transmission bandwidth: 20 MHz

Modulation: DSSS, CKK, OFDM

Weight: 0.167 KG

Energy metering range: 50-3600w

