


Connect 2RH to hotel room

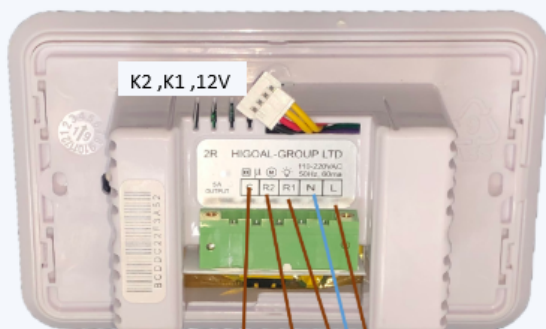


Input load
(12/24/110/220/Dry contact)

R2

R1

Phase Line

Zero Line

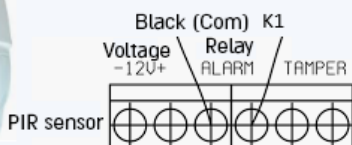

2RH connect/disconnect main power according to the presence in the room. Power will be connected when door magnet detect entrance to the room, PIR sensor will check for movement for 40 seconds. If movement not detected, the power will be turned off a minute after detection time over.

Notice: output will be turned on for 20 seconds before power is shutting down.

Every movement detection will turn on power

Detailed instructions can be found on guide.

R1 - Room's main power.
R2 - Shutter down channel.
C - Bridge with L (R1, R2 Common).
K1 - Door magnet connection.
K2 - PIR sensor connection.
Red/Black - 12V for PIR.